

Number	21-001283-PR54 (NW-K08-0209-en-03)
Owner	Ramsauer GmbH & Co. KG Alte Bundesstr. 147 5350 Strobl Austria
Product	Impregnated joint-sealing tape made of cellular plastics
Designation	1082 Kompriband Pro
Details	Material flexible polyurethane foam Impregnation material: acrylate-based Adhesion surface: self-adhesive on one side, acrylate-based
Special features	For deviations from the requirements (extended field of application) see Table 1 on Page 2.
Validity	The validity of the evidence of performance ends after 5 years at 21.12.2030.

Result

The evaluation/designation as impregnated joint sealing tape is possible for the following stress group according to DIN 18542 : 2020-04.

Joint sealing tape DIN 18542 - BG 1

(Requirement and detailed results see Page 2)

Basis

DIN 18542:2020-04
Impregnated sealing tapes made of cellular plastics for sealing of outside wall joints – Requirements and testing

ift-Nachweis:
20-001119-PR02
(NW-K08-0209-en-02)

ift Product certification QM 304
contract no. 159 6017301 dated
25.09.2006

Replaces ift-Nachweis
21-001283-PR54
NW-K08-0209-en-02

Representation



Instructions for use

The results obtained can be used as evidence in accordance with the above basis.

When using this document the up-to-dateness of above basis and the conformity of the product have to be observed.

The data and results given relate solely to the tested/described specimen. This test/evaluation does not allow any statement to be made on further characteristics of the present structure regarding performance and quality.


Notes on publication

The ift-Guidance Sheet "Conditions and Guidance for the Use of ift Test Documents" applies. The document may only be published in full.

ift Rosenheim
10.02.2026



Thomas Stefan, Dipl.-Ing. (FH)
Head of Testing Department
Building Component Testing

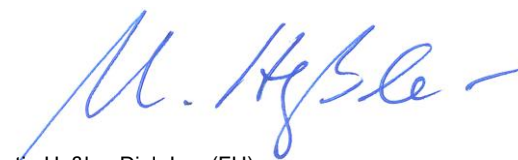

Martin Heßler, Dipl.-Ing. (FH)
Project Engineer
Building Component Testing

Identity-Check



www.ift-rosenheim.de/ift-qeprueft
ID: D0B-B77F2

Table 1 Requirements and detailed results - in stress group external use - BG 1

Properties according to DIN 18542, Section		Requirements for stress group	Results of test
		External use - BG 1	
7	Transferability to the delivery range	(see Table 2)	fulfilled
8.2	Coefficient of air infiltration, α -value	$\alpha < 1.0 \text{ m}^3 / [\text{h}\cdot\text{m}\cdot(\text{daPa})^n]$	fulfilled
	Air tightness	$\alpha < 1.0 \text{ m}^3 / [\text{h}\cdot\text{m}\cdot(\text{daPa})^{2/3}]$	fulfilled
8.3	Water tightness of joints at Δp	$\geq 600 \text{ Pa}$	fulfilled
8.4	Water tightness of joint crossings at Δp	$\geq 600 \text{ Pa}$	fulfilled
8.6	Thermal shock resistance	-20°C to $+80^\circ\text{C}$	fulfilled *)
8.7	Resistance to the effects of light and moisture	must be ensured	fulfilled
8.8	Compatibility with adjoining building material tested	up to $+80^\circ\text{C}$	fulfilled (**)
8.10	Water vapour permeability, s_d -value ($s_d = \mu \cdot t_{F,max}$)	$\leq 0.5 \text{ m}$	fulfilled
8.12	Reaction to fire	B1	fulfilled
*) fulfilled with extended temperature range from -30°C to $+90^\circ\text{C}$.			
**) tested with additional grounds: PMMA, steel raw, steel zinc plated, stainless steel, aluminium anodized			

The following table shows the delivery range for the joint-sealing tape 1082 Kompriband Pro specified by the client.

Table 2 Delivery range 1082 Kompriband Pro

Designation: $t_F / b_{min} - b_{max}$									
8/1-2	10/1-4	10/2-6	10/4-9	12/5-12	15/6-15	20/9-20	20/11-25	30/18-34	30/24-42
10/1-2	15/1-4	12/2-6	15/4-9	15/5-12	20/6-15	25/9-20	25/11-25	40/18-34	40/24-42
15/1-2	20/1-4	15/2-6	20/4-9	20/5-12	25/6-15	30/9-20	30/11-25	50/18-34	50/24-42
20/1-2	25/1-4	20/2-6	25/4-9	25/5-12	30/6-15	40/9-20	40/11-25		
25/1-2	30/1-4	25/2-6	30/4-9	30/5-12	40/6-15	50/9-20	50/11-25		
30/1-2	40/1-4	30/2-6	40/4-9	40/5-12	50/6-15				
40/1-2	50/1-4	40/2-6	50/4-9	50/5-12					
50/1-2		50/2-6							